



# Calpeda NGL Series

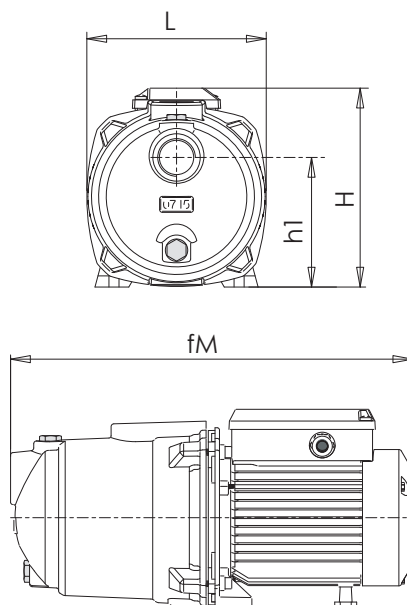

- Close coupled self priming shallow well pump with a built in ejector
- Suitable for bad suction conditions such as from a bore or through a long supply pipe
- Cast iron jet pump

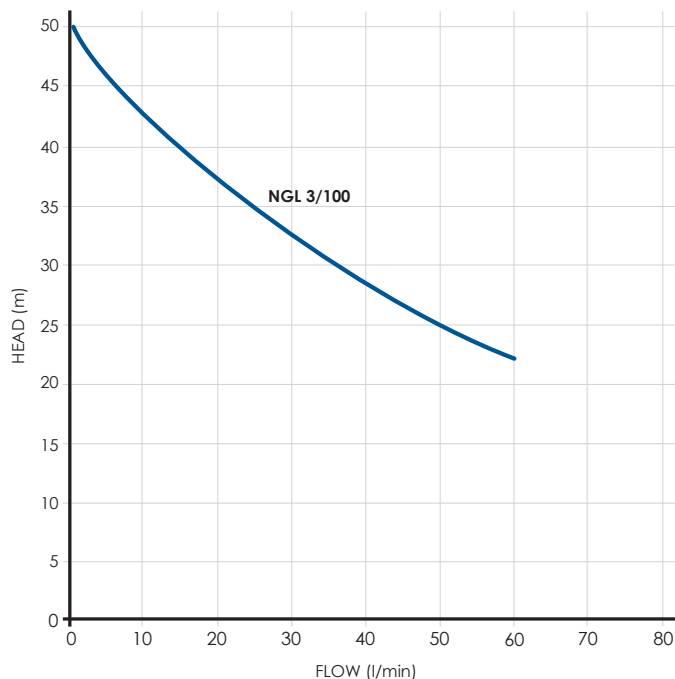

## PERFORMANCE GUIDE

Code	No. of Bathrooms	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Suction Depth (m)	Inlet (mm)	Outlet (mm)
PUCALNGL3-100T	1-1.5	50	60	71	7	25	25

## ELECTRICAL DATA

Code	Current Type	kW	Hp	Amps	RPM/min	Insulation Class	Voltage (V)	Frequency (Hz)
PUCALNGL3-100T	Three	0.65	0.9	1.7	2800	F	230/400	50

## DIMENSIONS + WEIGHTS

Code	L (mm)	H (mm)	h1 (mm)	fM (mm)	Weight (kg)
PUCALNGL3-100T	161	192	116	391	12.1



Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services  
 06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremaine Avenue, Palmerston North