


Calpeda MXH Series



- Horizontal multi-stage closed coupled pump
- Suitable for water supply and domestic use
- Stainless steel
- Self priming

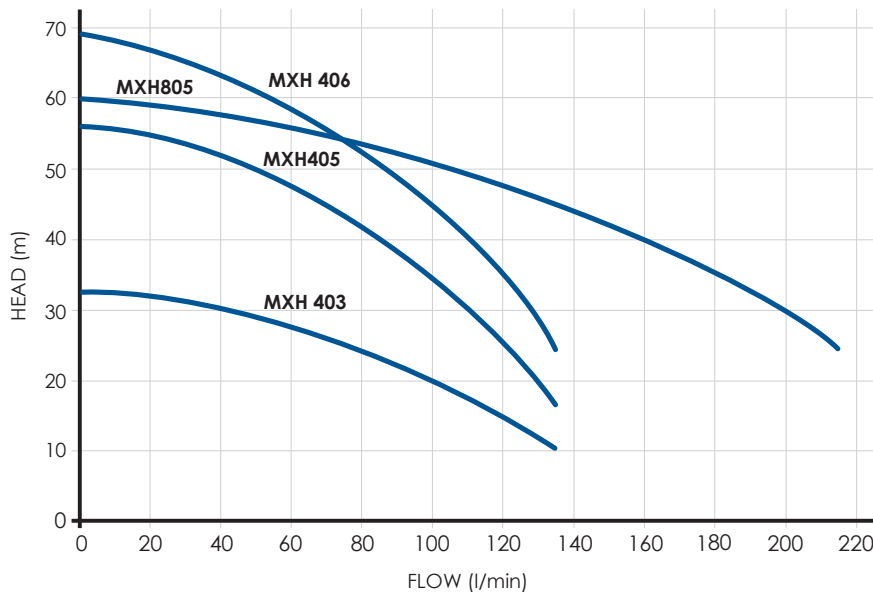

PERFORMANCE GUIDE

Code	No. of Bathrooms	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Suction Depth (m)	Inlet (mm)	Outlet (mm)
PUCALMXH403/A	1-2	33	133	47	7	32	25
PUCALMXH405M	1-2	56	135	79	7	32	25
PUCALMXH405BT	1-2	52	133	81	7	32	25
PUCALMXH406A	1-2	68	130	97	7	32	25
PUCALMXH805M	2-3	60	216	85	7	40	25
PUCALMXH805T	2-3	60	216	85	7	40	25

ELECTRICAL DATA

Code	Current Type	kW	Hp	Amps 230/400V	RPM/min	Capacitor (µF)	Insulation Class	Voltage (V)	Frequency (Hz)
PUCALMXH403/A	Three	0.55	0.75	2.8/1.6	2800	-	F	230/400	50
PUCALMXH405M	Single	1.1	1.5	7.4	2800	30	F	230	50
PUCALMXH405BT	Three	1.1	1.5	4.7/2.7	2800	-	F	230/400	50
PUCALMXH406A	Three	1.5	2.0	6.2/3.6	2800	-	F	230/401	50
PUCALMXH805M	Single	1.8	2.5	11.2	2800	50	F	230	50
PUCALMXH805T	Three	1.8	2.5	7.5/4.3	2800	-	F	230/400	50




Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services
 06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremaine Avenue, Palmerston North

Calpeda MXH Series



- Horizontal multi-stage closed coupled pump
- Suitable for water supply and domestic use
- Stainless steel
- Self priming

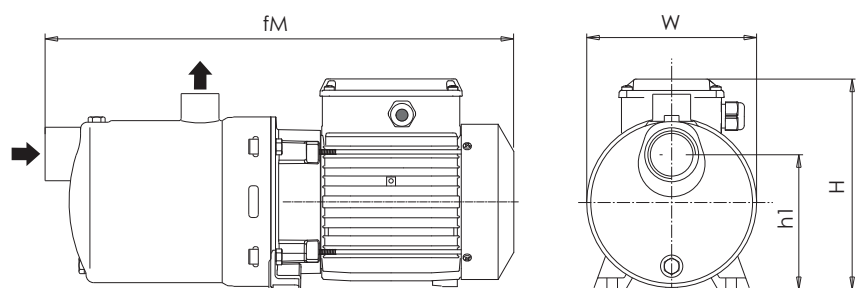

DIMENSIONS + WEIGHTS

Code	fM (mm)	W (mm)	H (mm)	h1 (mm)	Weight (kg)
PUCALMXH403/A	357	160	193	127	9.3
PUCALMXH405M	476	160	210	127	16.2
PUCALMXH405BT	476	160	210	127	18
PUCALMXH406A	500	160	210	127	18.4
PUCALMXH805M	552	160	210	127	22.6
PUCALMXH805T	552	160	210	127	21.6

SERVICE PARTS

Code	Component	Size (mm)	Pump
MECAL14mmMXH	Mechanical seal	14	MXH



Electric Motors | Drives | Pumps | Bearings | Power Transmission | Workshop Services
 06 354 3651 | sales@soco.co.nz | www.soco.co.nz | 471 Tremain Avenue, Palmerston North